
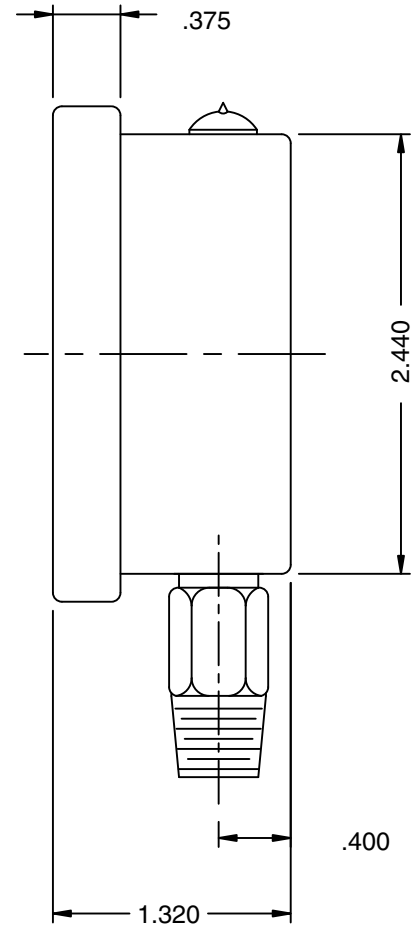


Ambient Temperature: -40°C / 65°C (-40°F / 150°F) Dry; -20°C / 65°C (-4°F / 150°F) Liquid Filled
Process Temperature: -40°C / 65°C (-40°F / 150°F) Dry; -20°C / 65°C (-4°F / 150°F) Liquid Filled
Case: AISI 304 SS
Ring: 304 SS
Lens: Polycarbonate
Dial: White aluminum with black & red markings
Pointer: Aluminum, anodized black
Bourdon Tube: 316 SS
Movement: 304 SS
Socket: 316 SS
Welding: TIG
Accuracy: 1.5% of full scale
Enclosure: IP65

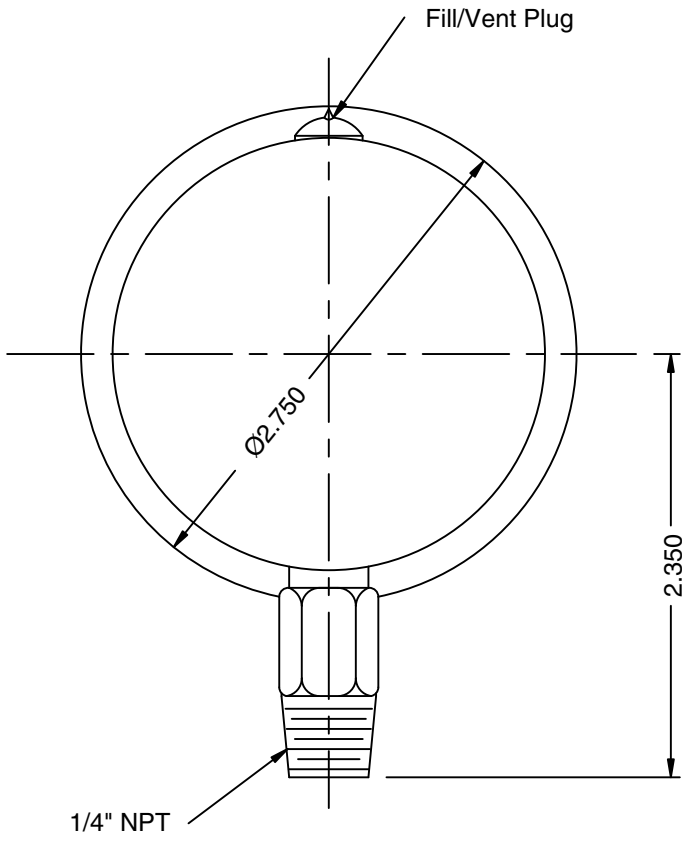

DRAWN BY: PHOEBE MA
ENG. APPROVAL:

ALL DIMENSIONS IN INCHES	
TOLERANCES (unless otherwise stated)	
Fractional:	1/64"
Decimal:	0.06"
REVISION No & DATE: #1 March 18, 2009	

TITLE:
2.5" PREMIUM AMMONIA GAUGE, BOTTOM CONNECTION
DRAWING NO: PAM-25-S-S-A