
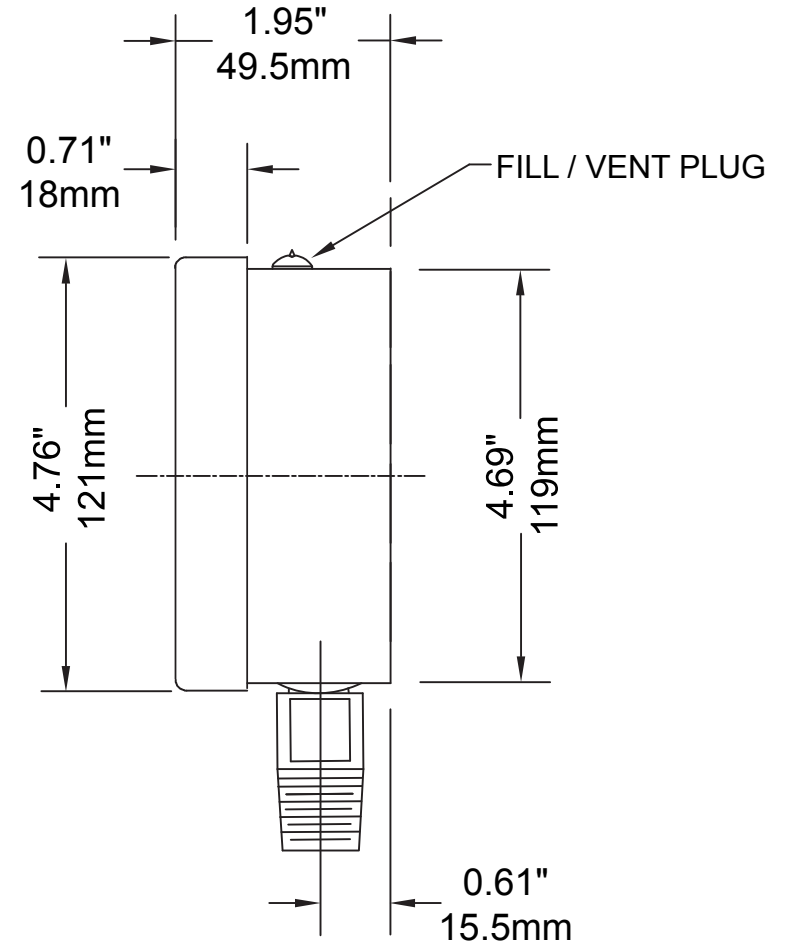


Case Material: AISI 304 stainless steel
 Lens Material: Polycarbonate
 Ring: 304 stainless steel, bayonet mount
 Socket: 316L SS, one-piece welded construction
 Tube: 316L SS
 Movement: Stainless Steel
 Accuracy: $\pm 1\%$ (ANSI/ASME Grade 1A)
 Ambient Temp. Limits Glycerin Fill: -4°F to 150°F (-20°C to 65°C)
 Process Temp. Limits Glycerin Fill: -4°F to 150°F (-20°C to 65°C)
 Enclosure Rating: IP66
 Lens Ring Gasket: Buna-N (NBR)
 Fill Plug: Buna-N (NBR)
 Option: Silicone plugs & gaskets

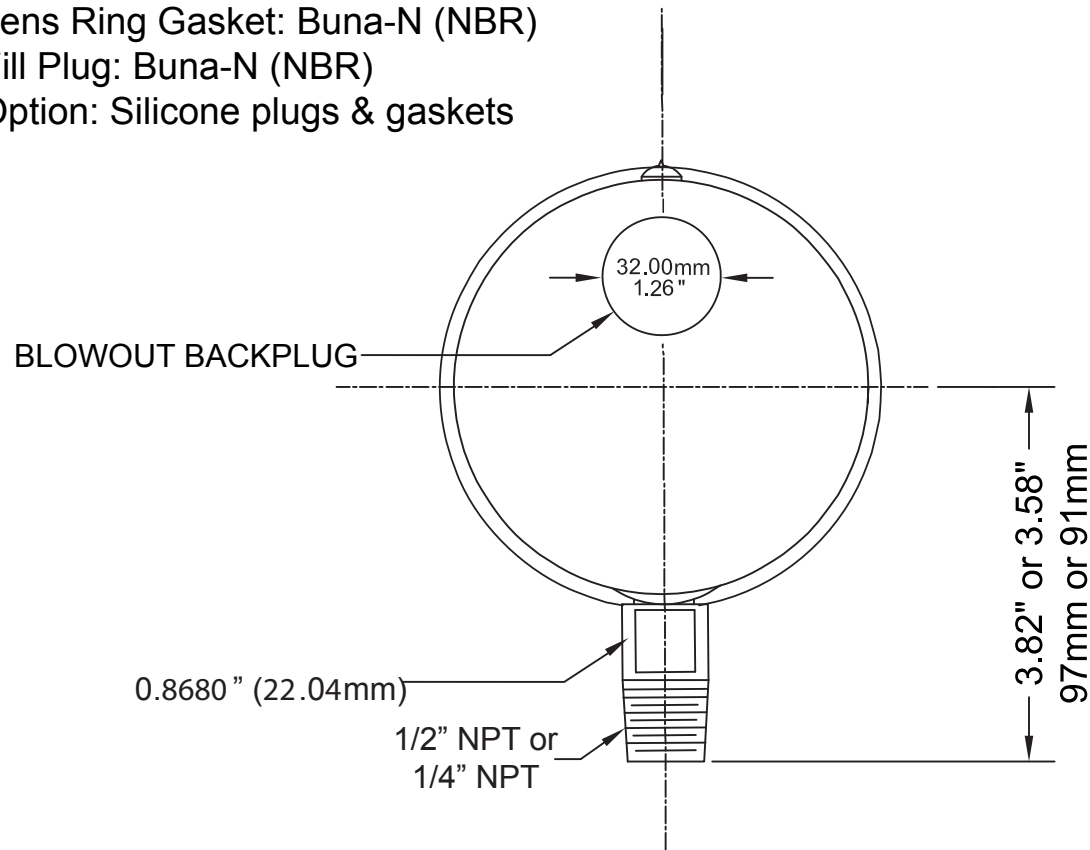

DRAWN BY: ROBIN LUGTU

ENG. APPROVAL: DR

ALL DIMENSIONS IN INCHES/MM

TOLERANCES (unless otherwise stated)	
Fractional:	$\frac{1}{64}$ " 0.4mm
Decimal:	0.06" 1.5mm

REVISION No AND DATE: #1 July. 7 2017

TITLE:

4.5" PREMIUM GAUGE, BOTTOM CONNECTION

DRAWING NO: PFP-45-T-S-A